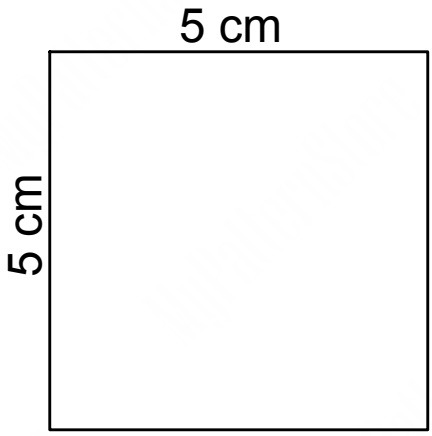

MyPatternStore
Modell 9-01-20

the seam allowances

1

Model 9-01-20
Size: Abult's face mask
Front (top fabric and lining)
Fabric cotton - 2 items

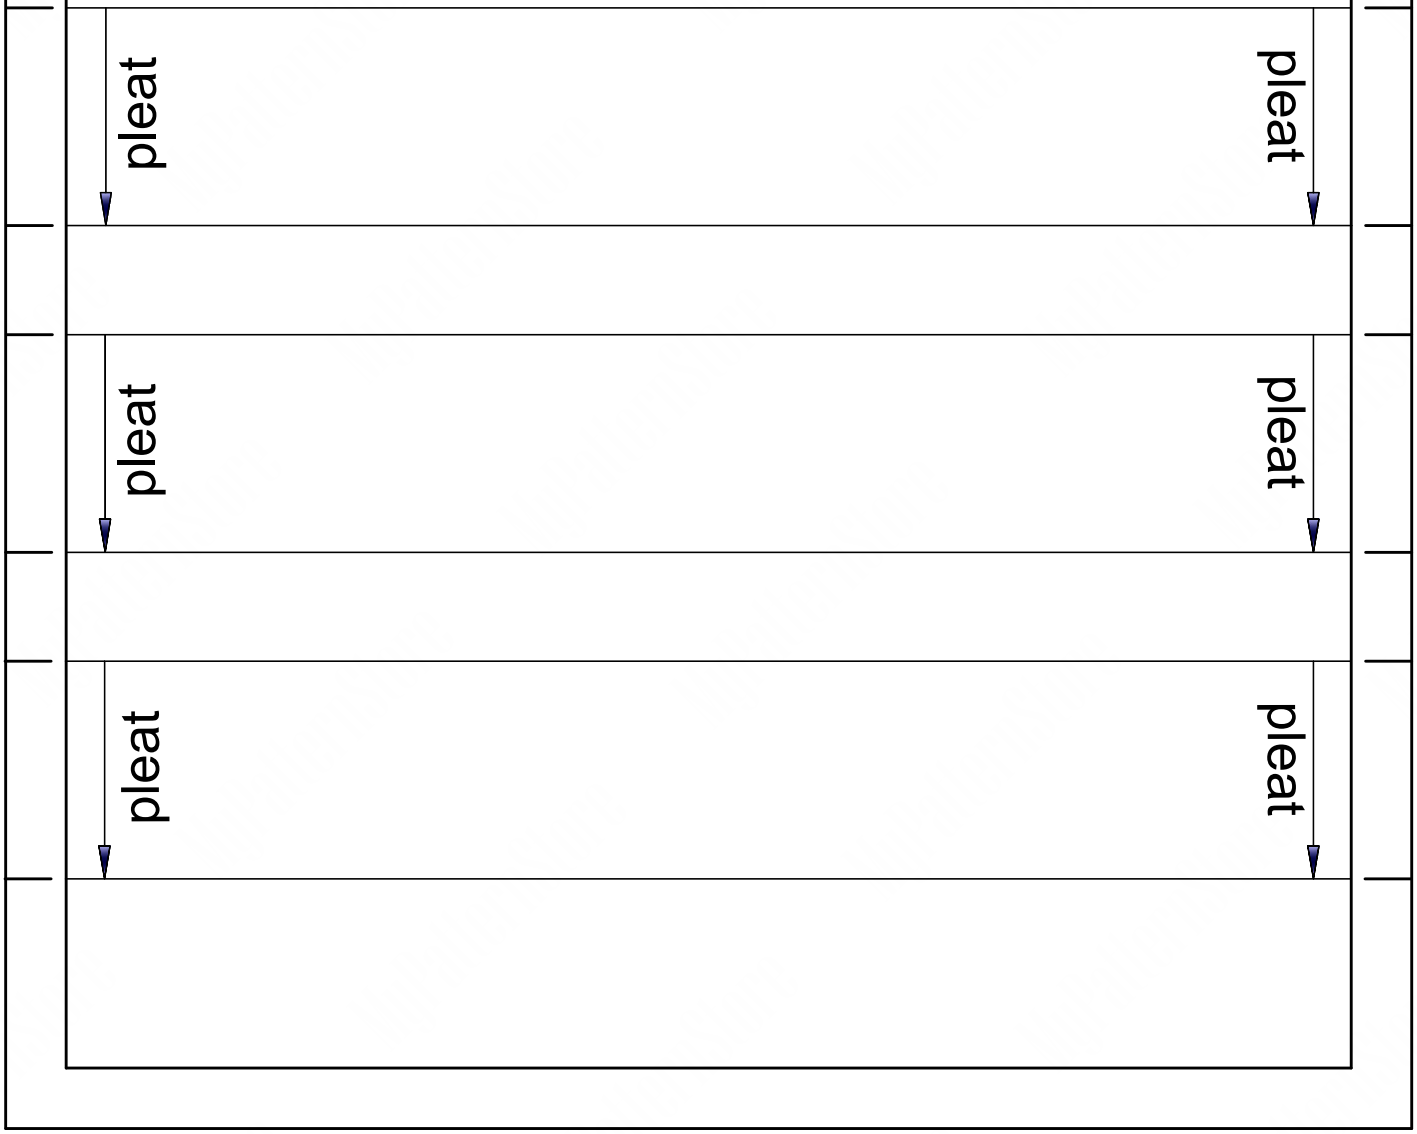

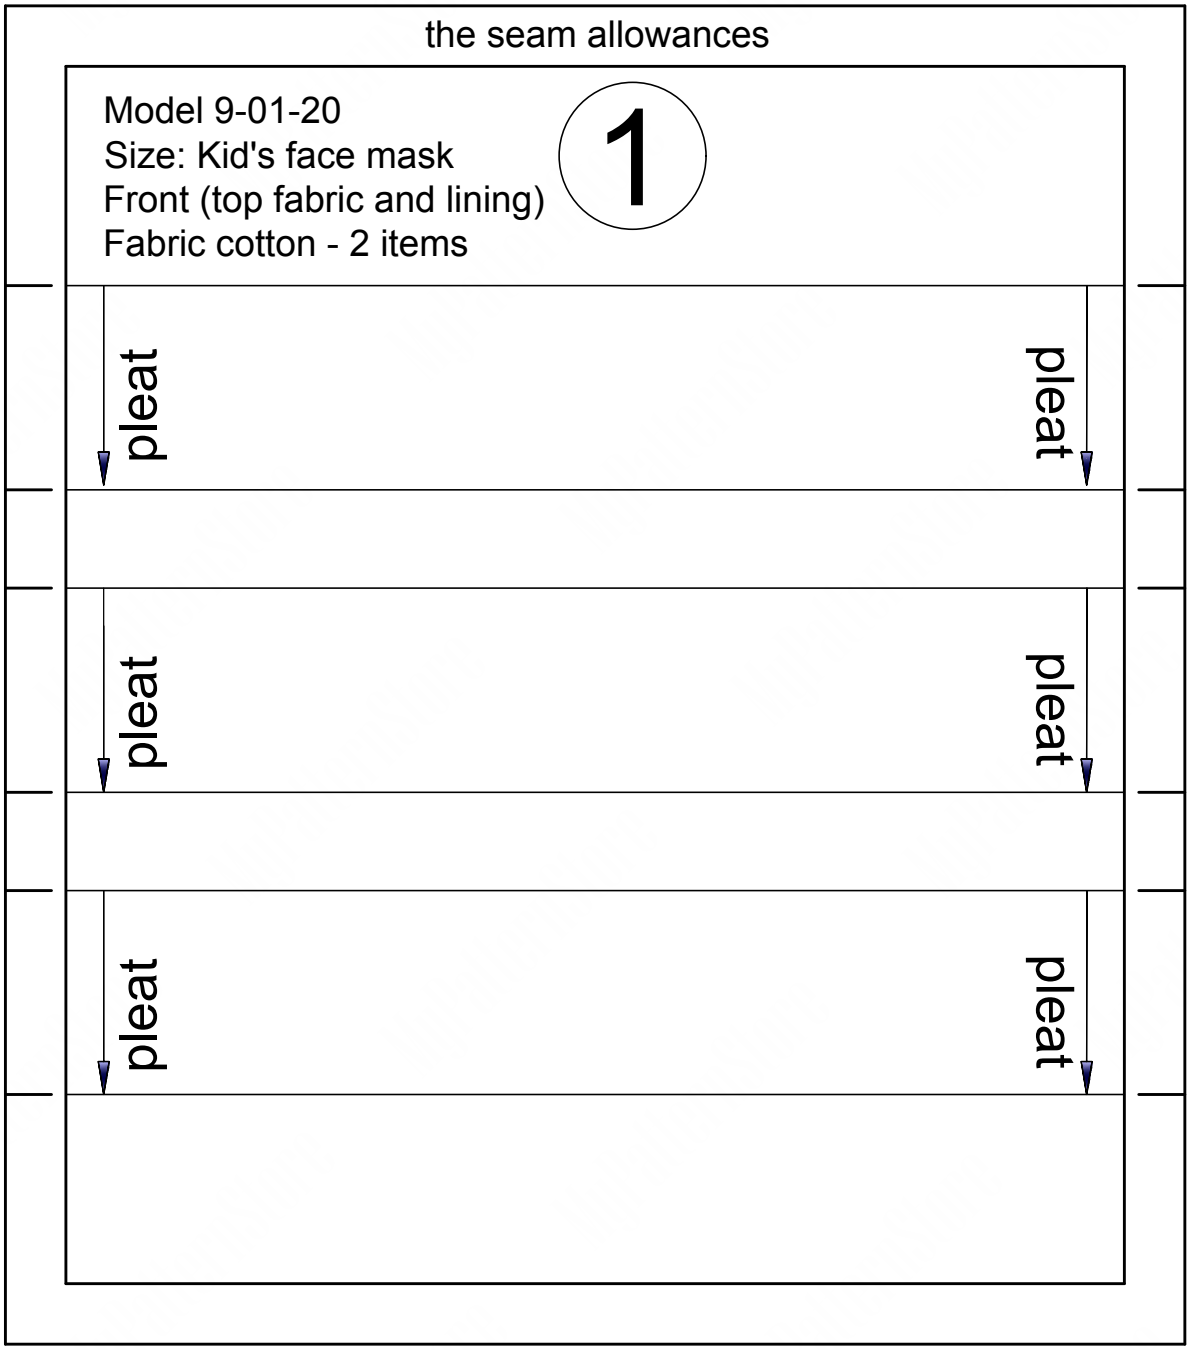
the seam allowances
Model 9-01-20
Size: Kid's face mask
Front (top fabric and lining)
Fabric cotton - 2 items
1
pleat
pleat
pleat
pleat
pleat
pleat

MyPatternStore Cutting and Sewing Instructions

Mask model ***9-01-20***

Recommended materials:

- fabric cotton - 40x20 cm (15.8x7.9 inch)

- elastic 30-40 cm (11,8-15,8 inch). The width of the elastic should be 0.5-0.7 cm (0.2-0.3 inch)

- wire for handicraft 8-10 cm

Technical sketch (photo):

** Sew masks to use fabric with the composition 100% cotton*

Sizes		Length	Width
Abult's face mask	cm	17.0	9.5
Kid's face mask	cm	14.0	8.0

Prepare pattern pieces

Step 1 Printing the Pattern

What you will need:

-Printer and A4 paper

-Sellotape

-Scissors

-Ruler

-Pencil

-Program Adobe Reader

Open pattern in Acrobat Reader.

Click "Print". In the opened window, set the options print as shown in the picture

Before you print the entire pattern, you need to print the first page in a pattern that has a “test square”

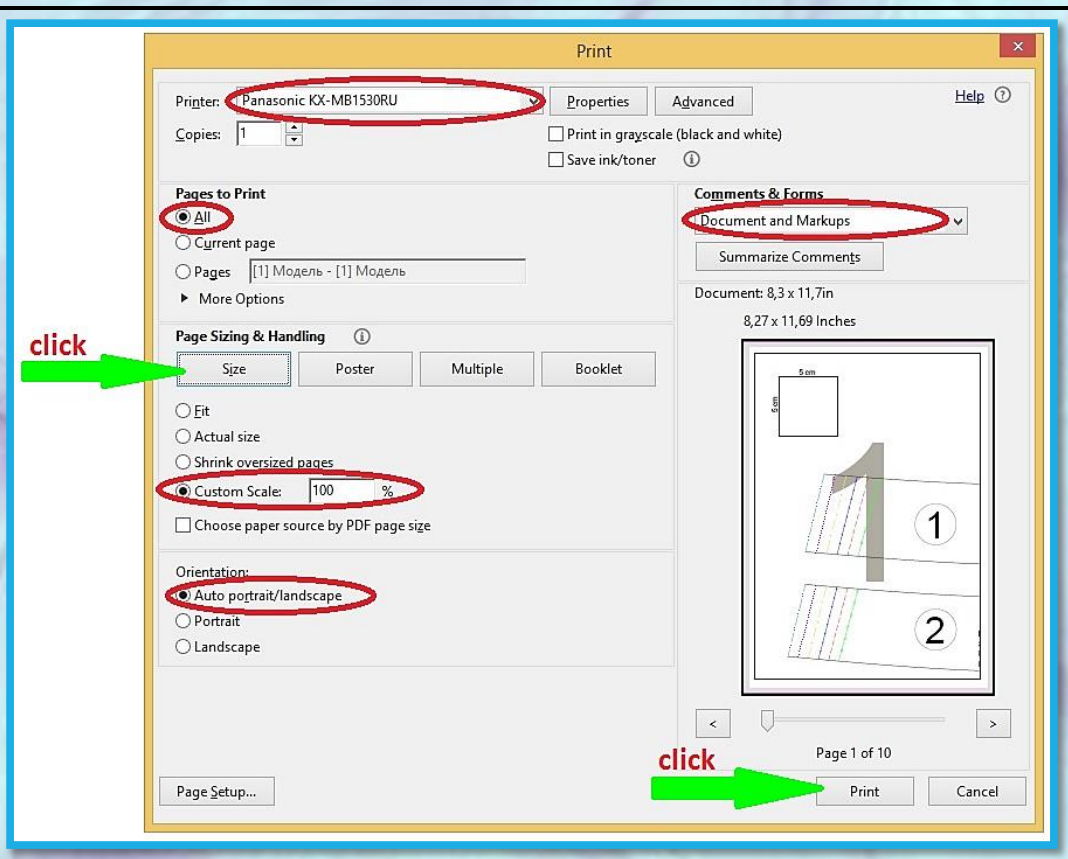

If you want to print only the Pattern , then in **"Pages to Print"** instead of "All" click "Pages" and enter 1-2

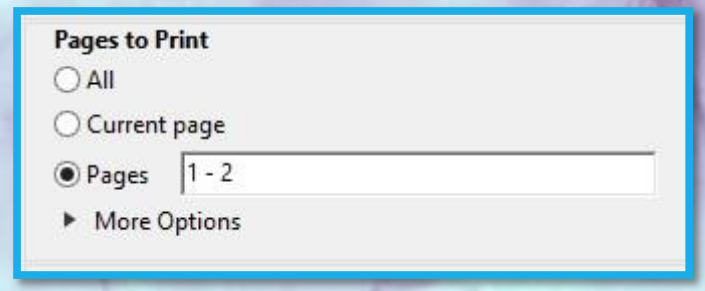

Step 2 | Check the size of the test square

The sides of the test square are exactly 5 cm (1.97”).

Once you print a page with a text box and it measures exactly 5cm, you can print the entire template!

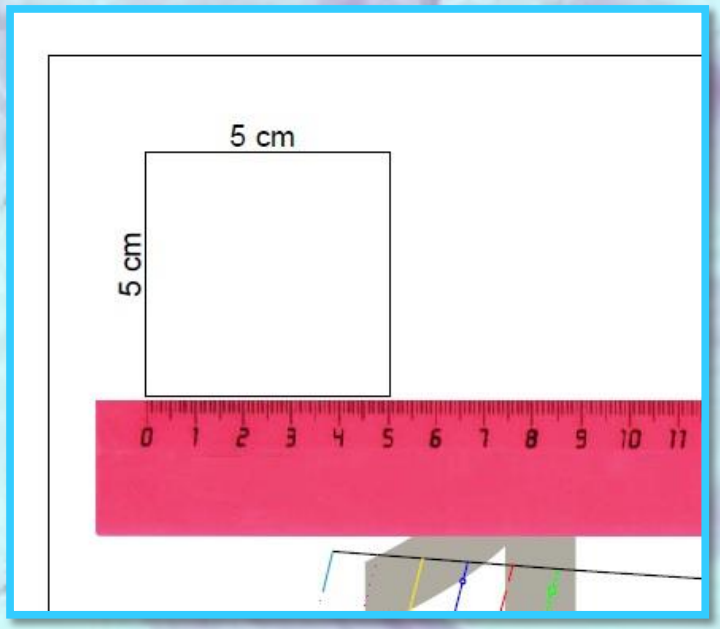

If the sides of the test square are not equal to 5 cm (1.97”), you need to change the print scale of the pattern to a greater or lesser value:

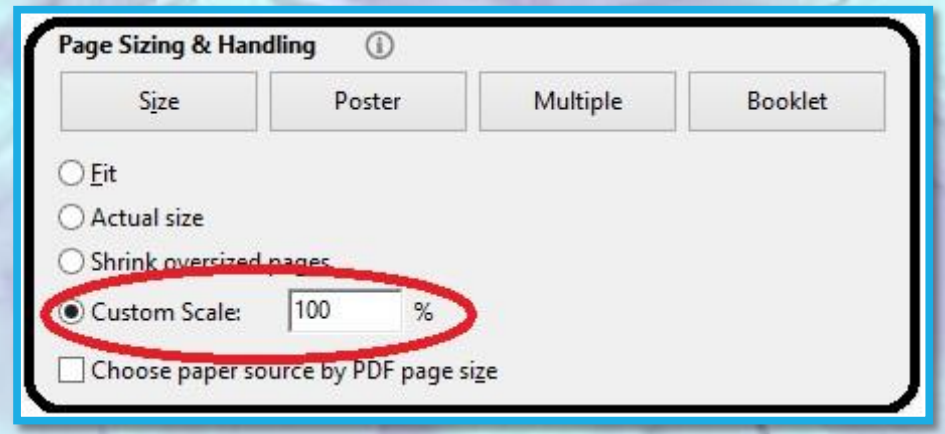

Cutting fabric pieces

PATTERN PIECES

Cotton fabric:		
1	Front (top fabric and lining)	2 items

Make sure you mark the seam allowance lines on the WRONG SIDE

The pattern has a seam allowance

Seam allowances are equal to 8 mm

For sewing face masks use a straight stich on the sewing machine

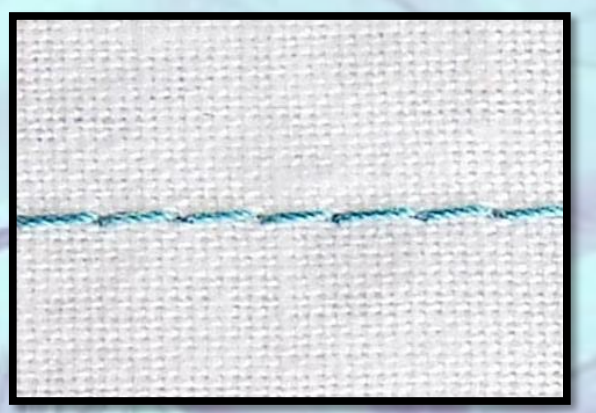

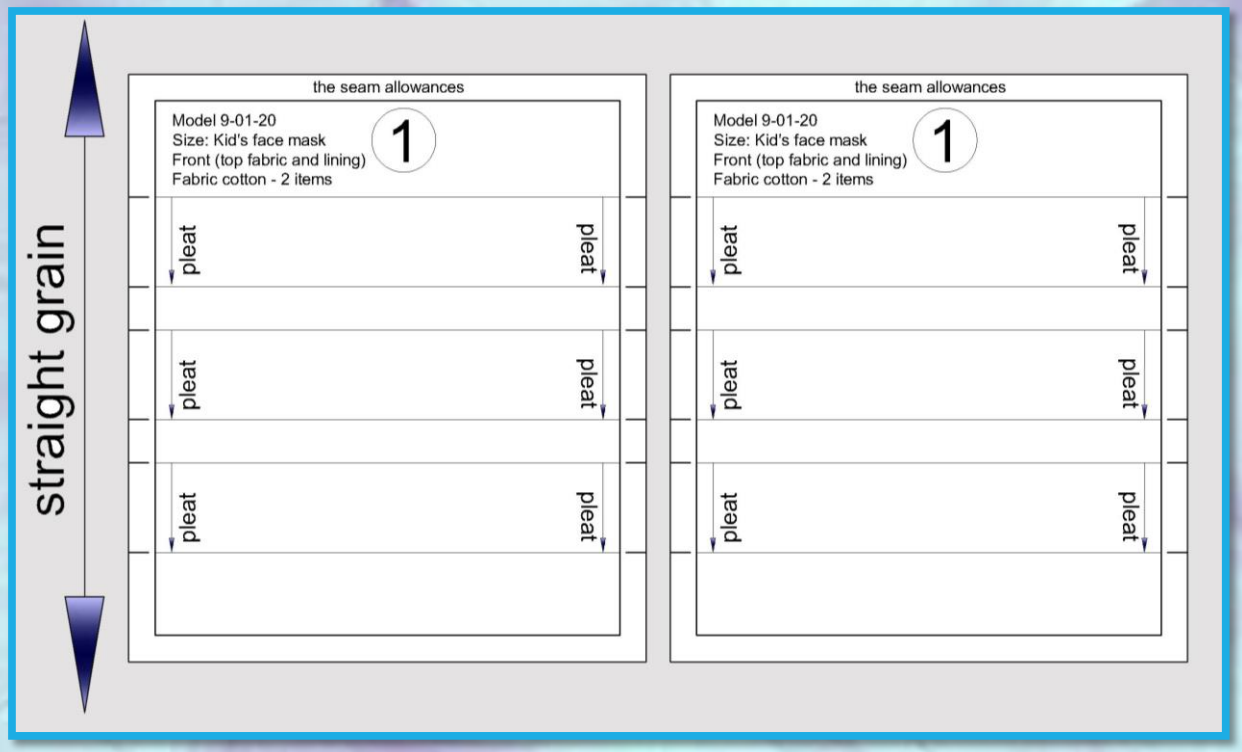

Sewing

1. Sew elastic bands to one of the parts. Length of **one** elastic band 18-20 cm (for adult) and 15-18 cm (for kid)

2. Lay the front and back right side inside. To equalize edge. Sew on the machine

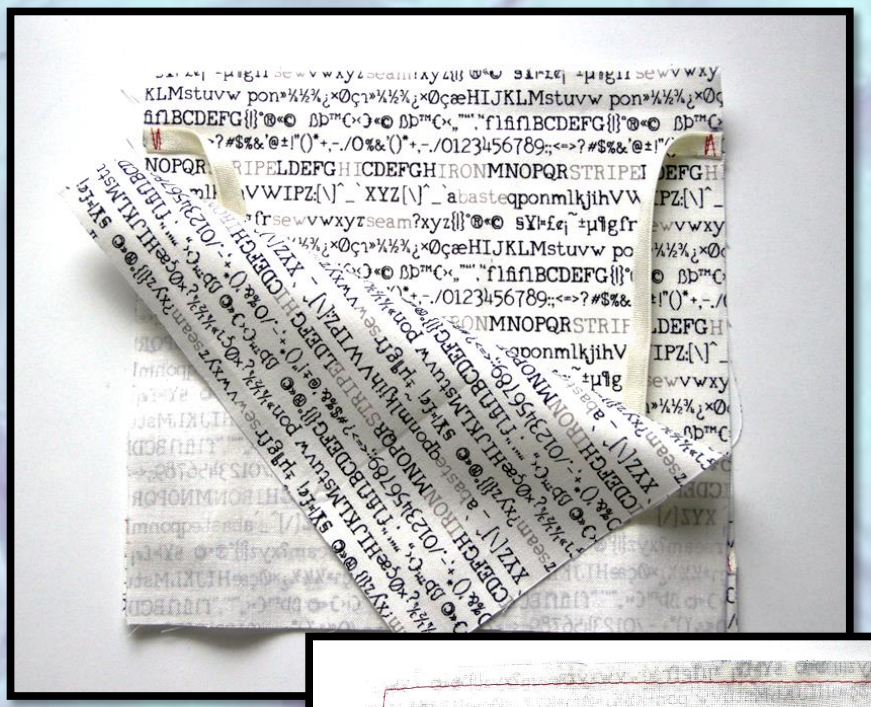

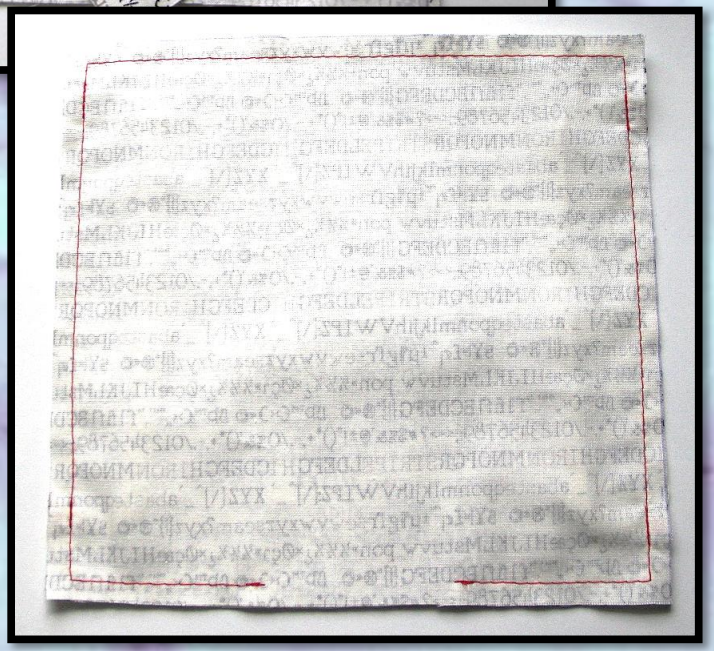

3. Turn out on the right side and iron

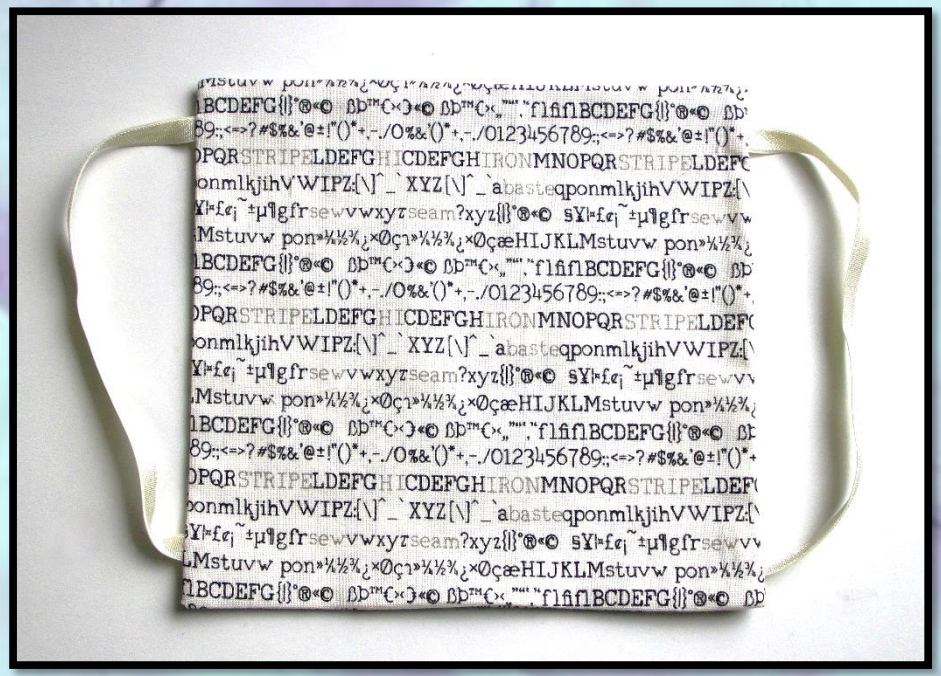

4. Attach the wire for handicraft to the top seam inside

5. Secure the wire for handicraft with a stitch and Bar tack

6. Lay the creases using markers on the pattern. Secure with sewing pins
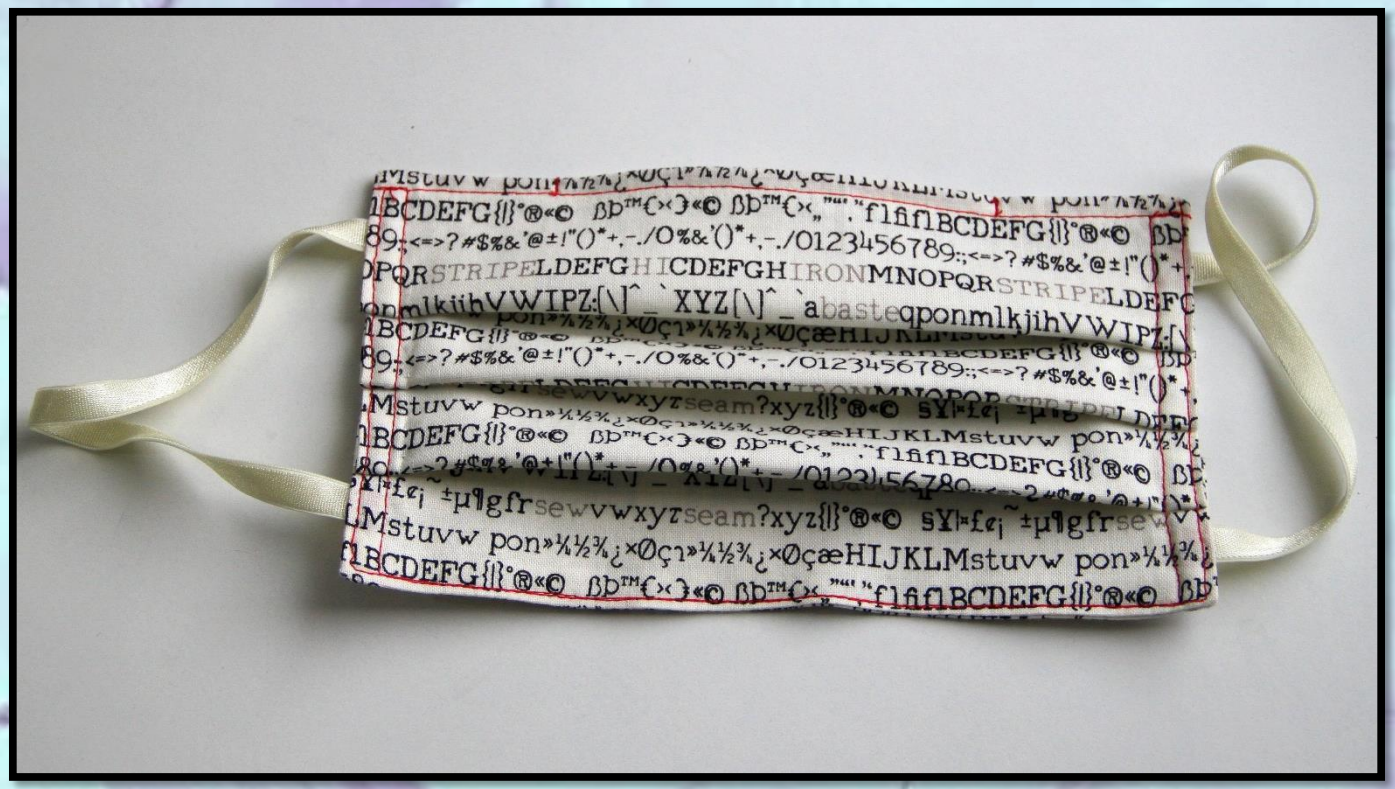
7. Fix the creases on the sewing machine. It turned out like this: